


TULIP CHANDELIER 4491/4492

PROJECTPROJET

SPEC TYPE

NOTES

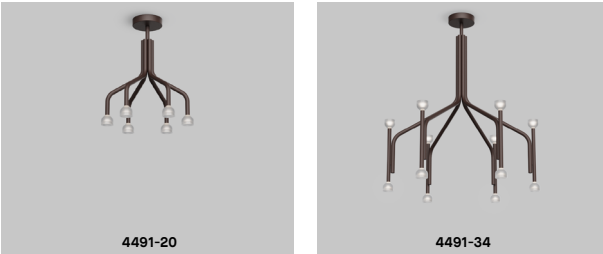


DIFFUSERDIFFUSEUR



FINISH




MOUNTING OPTIONSOPTIONS DE MONTAGE

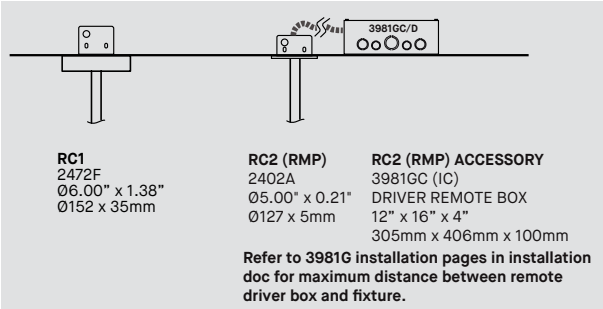

PRODUCT CHARACTERISTICS CARACTÉRISTIQUES DU PRODUIT






SPECIFICATION


ORDERING SPECIFICATION		SPÉCIFICATION DE COMMANDE		CODE	
MODEL MODÈLE					
4491-20	SMALL CHANDELIER (18" Ø X 20" H.) - 6 LIGHT SOURCES				
4491-34	MEDIUM CHANDELIER (34" Ø X 39" H.) - 12 LIGHT SOURCES				
4491-48	LARGE CHANDELIER (48" Ø X 56" H.) - 12 LIGHT SOURCES				
4492-48	2 TIERS LARGE CHANDELIER (48" Ø X 63" H.) - 24 LIGHT SOURCES				
DIFFUSER DIFFUSEUR					
BLB	BULB - RECESSED FLAT LENS (BEAM ANGLE 20°)				
BUD	BUD - 1" SMALL DIFFUSER, FROSTED				
BSM	BLOSSOM - 2" LARGE DIFFUSER, FROSTED				
LIGHT SOURCE SOURCE LUMINEUSE		LED			
LED	REGULAR OUTPUT				
COLOR TEMPERATURE TEMPÉRATURE DE COULEUR					
WDIM	2200K-5000K				
27	2700K (STATIC WHITE)				
30	3000K (STATIC WHITE)				
35	3500K (STATIC WHITE)				
40*	4000K (STATIC WHITE)				
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
COLOR RENDERING INDEX (CRI) INDICE DE RENDU DE COULEUR (IRC)		90			
90	90+ CRI				
VOLTAGE VOLTAGE					
120V	120 VOLT				
277V	277 VOLT				
CONTROL OPTION OPTION DE CONTRÔLE					
DV	0-10V DIMMING (120V-277V)				
DP	PHASE DIMMING (120V ONLY)				
NLTAIR2*	NLIGHT AIR CONTROL GEN 2				
NLIGHT*	NLIGHT WIRED CONTROL				
* NLIGHT INTEGRATION REQUIRES A REMOTE POWER PACK (39NLA A FOR NLTAIR2 OR 39NLWA FOR NLIGHT)					
REFER TO NLIGHT GUIDE AND INSTALLATION SHEET FOR ALL REQUIREMENTS.					
STEM LENGTH LONGUEUR DE TIGE					
6"	6" STEM				
12"	12" STEM				
18"	18" STEM				
24"	24" STEM				
30"	30" STEM				
* ONLY 6" AND 12" STEM FOR PETITE CHANDELIER					
CUSTOM STEM LENGTH POSSIBLE UP TO 96". LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
MOUNTING MONTAGE					
RC1*	SCREWLESS 6.00" X 1.38"H. CANOPY (2472F)				
RC2**	REMOTE DRIVER OPTION FLUSH SCREWLESS CANOPY Ø5.00"X0.21" (2402A)				
*3983 ACCESSORY PROVIDED					
**REQUIRES ACCESSORY 3981GC.					
TUBE FINISH FINI TUBE					
BLKE	BLACK	CBE*	CHOCOLATE BROWN	NBE*	NAVY BLUE
WHE	WHITE	CPE*	CLAY PINK	SBE*	SAND BEIGE
CHM*	CHAMPAGNE METALLIC	DBE*	DYNAMIC BLUE	SGE*	SAGE GREY
SIM*	SILVER METALLIC	GGE*	GRASS GREEN	STE*	SUMMER TEAL
AYE*	APRICOT YELLOW	HGE*	HUNTER GREEN	RAL**	PLEASE SPECIFY RAL CODE
BRE*	BRICK RED	LNE*	LUNAR GREY		
* ALL FINISHES ARE FINE TEXTURED WITH THE EXCEPTION OF CHM, SIM					
* LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
** SPECIFY 4 DIGIT RAL CLASSIC CODE. LONGER LEAD TIME MAY APPLY, PLEASE CONTACT YOUR EUREKA REPRESENTATIVE					
ACCESSORY ACCESSOIRE					
3981GC	DRIVER BOX FOR REMOTE INSTALLATION - 4" X 12" X 16"				
3983	DEEP JUNCTION BOX				

TULIP CHANDELIER 4491/4492


4491-20

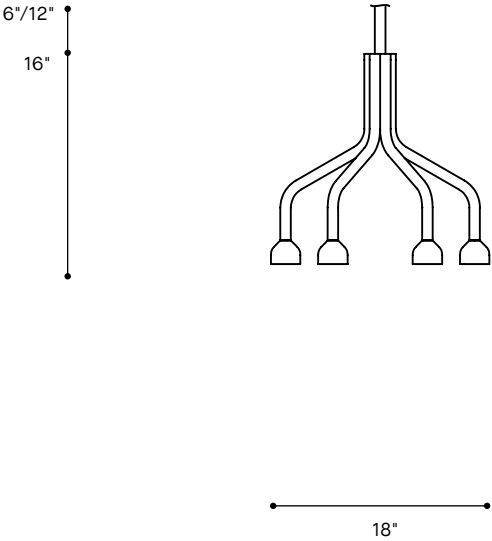


4491-34

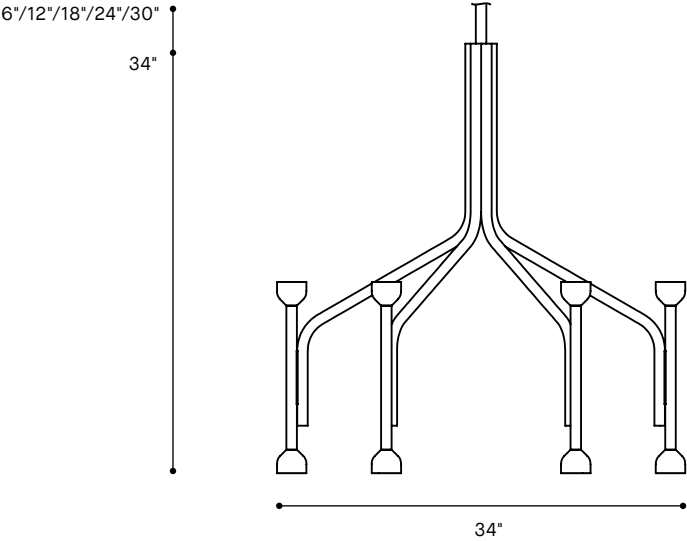

4491-48

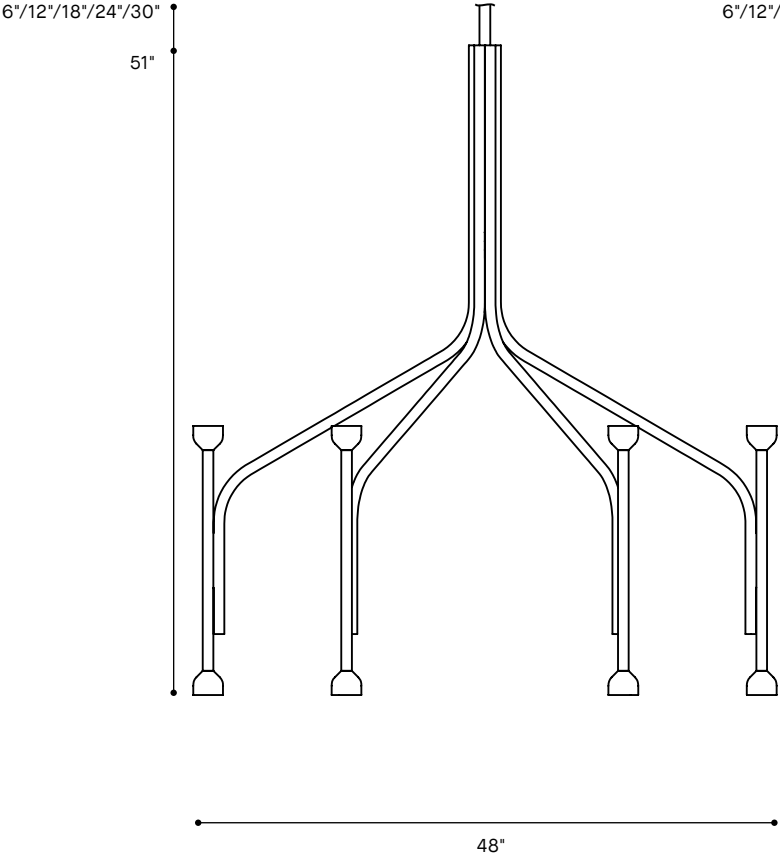

4492-48

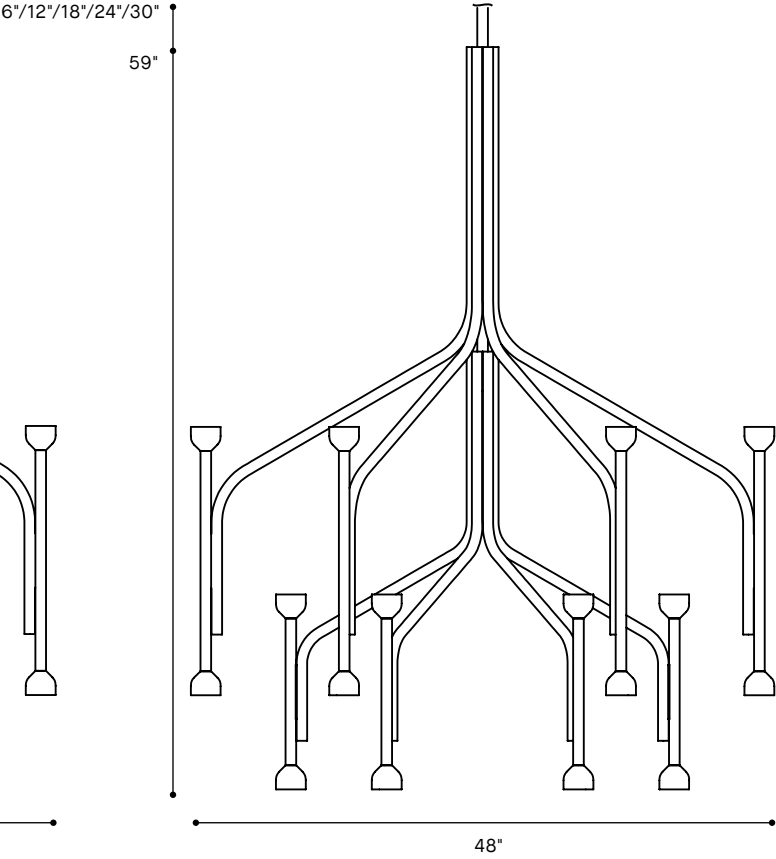

TULIP CHANDELIER 4491/4492 - FINISH OPTIONS / OPTIONS DE FINIS

Standard



**BLKE**  
Black Textured



**WHE**  
White Textured

Metallic



**CHM**  
Champagne



**SIM**  
Silver


Premium



**AYE**  
Apricot  
Yellow  
Textured



**BRE**  
Brick Red  
Textured



**CBE**  
Chocolate  
Brown  
Textured



**CPE**  
Clay Pink  
Textured




**DBE**  
Dynamic Blue  
Textured



**GGE**  
Grass Green  
Textured



**HGE**  
Hunter Green  
Textured



**LNE**  
Lunar Gray  
Textured



**NBE**  
Navy Blue  
Textured



**SBE**  
Sand Beige  
Textured



**SGE**  
Sage Gray  
Textured



**STE**  
Summer Teal  
Textured

TULIP CHANDELIER 4491/4492

**SCREWLESS CANOPY (RC1)**  
Ø 6" X 1.4"

**FLUSH CANOPY (RC2)**  
Remote driver(s)  
Ø 5" X 0.2"

Depending on the configuration, the fixture can weigh up to 50 lbs. Make sure that the junction box is properly installed to support this weight.

**EASY INSTALLATION**

Designed for quick and intuitive installation, the chandelier features an ingenious assembly system that ensures solid, precise connections between components.

**STEM LENGTH**  
From canopy

6" 12" 18" 24" 30"

**DIMENSIONS**

16" 18" Petite 34" 34" Medium 51" 48" Large 59" 48" Signature

**DIFFUSERS**

BULB BUD BLOSSOM

**ENVELOPING GLOW**

The chandelier emits a soft, enveloping glow—perfect for creating a warm and welcoming atmosphere.


**SEE ALSO : TULIP ESSENTIALS**

PRODUCT SPECIFICATION	PETITE	MEDIUM	LARGE	SIGNATURE
PERFORMANCE	BULB — BUD — BLOSSOM	BULB — BUD — BLOSSOM	BULB — BUD — BLOSSOM	BULB — BUD — BLOSSOM
SYSTEM WATTAGE	20 W	40 W	40 W	80 W
DELIVERED LUMENS (4000K)	688 — 844 — 867 LM	1373 — 1686 — 1730 LM	1373 — 1686 — 1738 LM	2691 — 2877 — 3385 LM
EFFICACY	35 — 43 — 44 LM/W	36 — 43 — 44 LM/W	35 — 43 — 44 LM/W	34 — 36 — 43 LM/W
OTHER INFORMATION				
WEIGHT	~ 5 LBS / 2.3 KG	~ 14 LBS / 6.3 KG	~ 21 LBS / 9.5 KG	~ 35 LBS / 16 KG
L70 (LUMEN MAINTENANCE)	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS

EFFICACY MULTIPLIERS

CRI	CCT	FACTOR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

LIGHT DISTRIBUTION

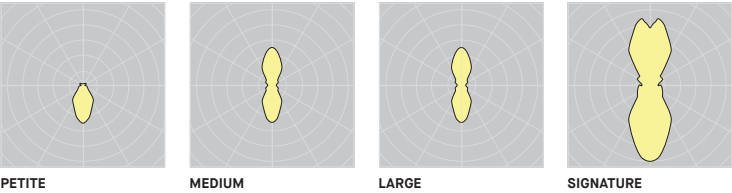


5 years warranty


Visit our website for warranty terms and conditions.

TULIP CHANDELIER 4491/4492

**PAVILLON SANS VIS APPARENTE(RC1)**  
Ø 6" X 1.4"



**PAVILLON PLAT SANS VIS APPARENTE (RC2)**  
Unité(s) d'alimentation DEL à distance  
Ø 5" X 0.2"



Selon la configuration, le luminaire peut peser jusqu'à 50 livres. Assurez-vous que la boîte de jonction est correctement installée pour supporter ce poids.

**INSTALLATION FACILE**  
Conçu pour une installation rapide et intuitive, le chandelier dispose d'un système d'assemblage ingénieux qui garantit des connexions solides et précises entre les composantes.

**LONGUEUR DE LA TIGE**  
From canopy

6" 12" 18" 24" 30"

**DIMENSIONS**

16" 18" Petite 34" 34" Medium 51" 48" Large 59" 48" Signature

**DIFFUSEURS**


BULB

BUD

BLOSSOM

**LUEUR ENVELOPPANTE**  
Le lustre émet une lueur douce et enveloppante, parfaite pour créer une ambiance chaleureuse et accueillante.

**À VOIR : ESSENTIELS TULIP**




SPECIFICATIONS PRODUIT	PETITE	MEDIUM	LARGE	SIGNATURE
PERFORMANCE	BULB — BUD — BLOSSOM	BULB — BUD — BLOSSOM	BULB — BUD — BLOSSOM	BULB — BUD — BLOSSOM
PUISSANCE TOTALE	20 W	40 W	40 W	80 W
LUMENS RÉELS (4000K)	688 — 844 — 867 LM	1373 — 1686 — 1730 LM	1373 — 1686 — 1738 LM	2691 — 2877 — 3385 LM
EFFICACITÉ	35 — 43 — 44 LM/W	36 — 43 — 44 LM/W	35 — 43 — 44 LM/W	34 — 36 — 43 LM/W
OTHER INFORMATION				
POIDS	~ 5 LBS / 2.3 KG	~ 14 LBS / 6.3 KG	~ 21 LBS / 9.5 KG	~ 35 LBS / 16 KG
L70 (MAINTENANCE DE LA LUMIÈRE)	60,000 HRS	60,000 HRS	60,000 HRS	60,000 HRS

FACTEUR D'EFFICACITÉ

IRC	CCT	FACTEUR
90+	4000K	1.00
90+	3500K	0.98
90+	3000K	0.94
90+	2700K	0.91

DISTRIBUTION LUMINEUSE

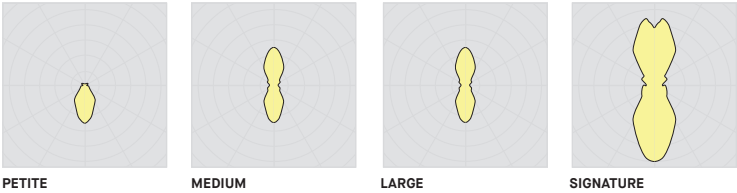



Visitez notre site Web pour les termes et conditions.